



1. Insert the spring into the channel of the appropriate extrusion.

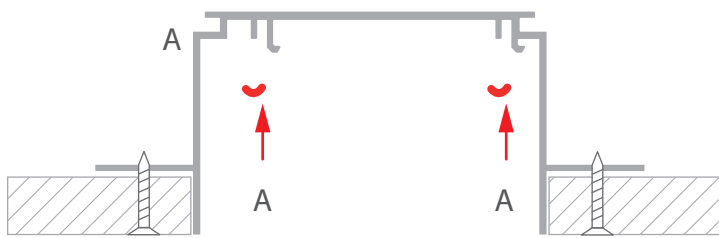

2. Mount the extrusion.

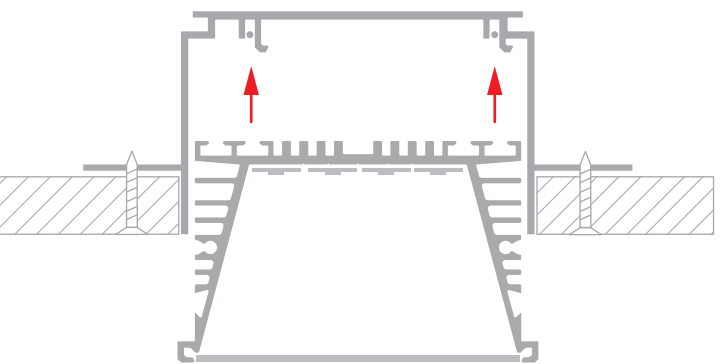

NOTE! A list of products corresponding with the selected accessories is available at www.KlusDesign.eu