# Profile LARKO-50

Ref. A00756



IP20 IP65

- Mounting to drywall
- High lumen output
- Invisible groove edge
- Possibility to mount the power supply in the luminous part of the luminaire
- Possibility to use current modules with efficiency up to 190lm/W and CRI>90. Available upon request.

## APPLICATION

- main and decorative lighting


## MOUNTING

- recessed, using dedicated accessories

## ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING




## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Material | **aluminum** |
| Color | **silver anodized** |
| Possible fixture IP | **20, 65** |
| Possible fixture shapes | **linear, polygonal** |
| Profile cross-section | **rectangular** |
| Width | **66 mm** |
| Height | **25 mm** |
| LED gluing width A | **42 mm** |
| Number of LED strips A (8 mm wide) | **5** |
| Width of the glow | **44.6 mm** |
| Max power of a single KLUŚ LED strip | **24 W/m** |
| Dedicated space for power supply | **yes** |
| Possibility of obtaining a line of light | **yes** |
| Building type | **Commercial, Entertainment/ Arts, HoReCa object** |
| Facility zone | **office, lobby / foyer** |
| The cover is cut to the length of the profile | **yes** |
| Can be easily connected into runs | **yes** |

| Length | Ref |
|---|---|
| 1000 mm | **A00756A_1** |
| 2005 mm | **A00756A_2** |
| 3010 mm | **A00756A_3** |

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

# Profile LARKO-50

Ref. A00756

| | |
|---|---|
| Mounting to drywall | yes |
| Wire out back of extrusion | yes |

## LINE OF LIGHT TABLE

| LED tape | LIGER-45 satin | LIGER-45 black |
|---|---|---|
| K-1275-24 | ✓ (3) | X |
| K-0960-24 | ✓ (3) | ✓ (4) |
| K-1440-24 | ✓ (3) | ✓ (4) |
| K-HD-0480-24 | ✓ (3) | ✓ (4) |
| K-HD-0960-24 | ✓ (3) | ✓ (4) |
| K-HD-1440-24 | ✓ (3) | ✓ (4) |
| K-0360-24 | ✓ (3) | ✓ (4) |
| K-0720-24 | ✓ (3) | ✓ (4) |
| K-1080-24 | ✓ (3) | ✓ (4) |
| K-0500-24 | ✓ (3) | ✓ (4) |
| K-1000-24 | ✓ (3) | ✓ (4) |
| K-1500-24 | ✓ (3) | ✓ (4) |
| K-CB-1000-24 | ✓ (3) | ✓ (4) |
| K-HD-0830-24 | ✓ (3) | ✓ (4) |
| K-HD-1260-24 | ✓ (3) | ✓ (4) |
| KWP-0360-24 | ✓ (3) | ✓ (4) |
| KWP-0720-24 | ✓ (3) | ✓ (4) |
| KWP-1080-24 | ✓ (3) | ✓ (4) |
| KWP-0500-24 | ✓ (3) | ✓ (4) |
| KWP-1000-24 | ✓ (3) | ✓ (4) |
| KWP-1500-24 | ✓ (3) | ✓ (4) |
| KWP-CB-1000-24 | ✓ (3) | ✓ (4) |
| KWP-GHD-0430-24 | ✓ (3) | ✓ (4) |
| KWP-GHD-0830-24 | ✓ (3) | ✓ (4) |
| KWP-HD-0430-24 | ✓ (3) | ✓ (4) |
| KWP-HD-0830-24 | ✓ (3) | ✓ (4) |
| KWP-HD-1260-24 | ✓ (3) | ✓ (4) |
| K-2300-24 | ✓ (3) | X |
| K-2400-24 | ✓ (3) | ✓ (4) |
| KWP-GDL-1229-24 | ✓ (3) | X |
| K-CR-1220-24 | ✓ (3) | X |
| K-CR-1275-24 | ✓ (3) | X |
| K-CRHD-1820-24 | ✓ (3) | ✓ (4) |

# Profile LARKO-50

Ref. A00756

| | | |
|---|---|---|
| K-CRHD-1910-24 | ✓ (3) | ✓ (4) |
| K-CR-0960-24 | ✓ (3) | ✓ (4) |
| K-CR-1440-24 | ✓ (3) | ✓ (4) |
| K-HEHD-0480-24 | ✓ (3) | ✓ (4) |
| K-HEHD-0960-24 | ✓ (3) | ✓ (4) |
| K-HEHD-1440-24 | ✓ (3) | ✓ (4) |
| K-HEHD-1920-24 | ✓ (3) | ✓ (4) |
| K-VHE-0480-24 | ✓ (3) | ✓ (4) |
| K-VHE-0960-24 | ✓ (3) | ✓ (4) |
| K-VHE-1440-24 | ✓ (3) | ✓ (4) |
| K-RGB-1200-24 | ✓ (3) | X |
| KWP-RGB-1200-24 | ✓ (3) | X |
| K-18D30-0960-24 | ✓ (3) | ✓ (4) |
| KWP-18D30-0960-24 | ✓ (3) | ✓ (4) |
| KWP-27T50-1440-24 | ✓ (3) | ✓ (4) |
| K-27T50-1440-24 | ✓ (3) | ✓ (4) |
| K-SD-1440-24 | ✓ (3) | ✓ (4) |

## Description

✓ - Line of Light for a number (X) of rows - Pixel free imaging

X - Visible Dotting from Diodes

HL - Centered Line of Light - Concentrated in middle

HL (X) - Centered Line of Light for a number (X) of rows - Concentrated in middle

## Line of Light Guide



Clean Line of Light (Pixel free imaging)



Centered Line of Light




Visible Dotting from Diodes

## SAMPLE PROJECTS





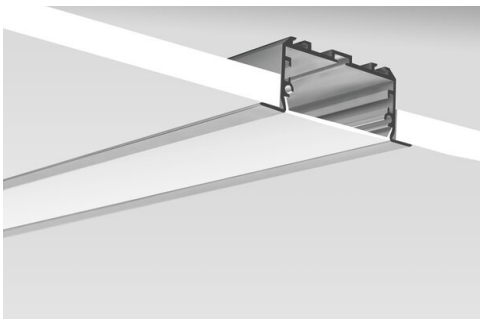

# Profile LARKO-50

Ref. A00756

## SIMILAR PROFILES



**Profile KOZUS-50**
A00958

## RELATED ACCESSORIES > COVERS

| NAME | KEY FEATURES | MATERIAL | MATERIAL TRANSMITTANCE | COLOR | REF. |
|---|---|---|---|---|---|
| Cover G-50S NEW  | - Compatible with LIPOD-50, KOZEL-50, KOZUS-50, and LARKO-50 profiles<br>- Features three lighting planes, creating an impressive, three-dimensional line of light<br>- Enables the creation of a light structure protruding above the ceiling, giving the installation a unique, architectural character<br>- Thanks to its modular design, it allows for flexible shaping of forms and spatial arrangements<br>- Provides uniform light distribution and high aesthetic finish | PC | 13 % | black | B17214B |
| | | | 69 % | satin | B17214S |
| Cover LIGER-45  | - hight light quality<br>- indoor use<br>- Ease of obtaining a line of light<br>- Perfectly diffusing | PC | 22 % | black | B17086B |
| | | | 64 % | satin | B17086S |

## RELATED ACCESSORIES > END CAPS

| NAME | MATERIAL | COLOR | REF. |
|---|---|---|---|
| End cap KOMPENSA-50S NEW  | ASA | black | C24664L07 |
| | | white | C24664L10 |
| End cap LARKO-50  | PP | gray | C28014C02 |

## RELATED ACCESSORIES > RELATED LED > WHITE MONO

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-0360-24 3.6 W/m, IP20 NEW | | 20 | 3.6 W/m | K-27-0360-24<br>K-30-0360-24<br>K-35-0360-24<br>K-40-0360-24<br>K-50-0360-24 |

# Profile LARKO-50

## Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-0480-24 | - universal for basic applications | 20 | 4.8 W/m | K-27-0480-24<br>K-30-0480-24<br>K-35-0480-24<br>K-40-0480-24<br>K-50-0480-24 |
| LED tape K-HD-0480-24 | - high LED density<br>- Ease of obtaining a line of light | 20 | 4.8 W/m | K-HD27-0480-24<br>K-HD30-0480-24<br>K-HD35-0480-24<br>K-HD40-0480-24<br>K-HD50-0480-24 |
| LED tape K-0500-24 5 W/m, IP20 NEW | | 20 | 5 W/m | K-30-0500-24<br>K-40-0500-24 |
| LED tape K-0720-24 7.2 W/m, IP20 NEW | | 20 | 7.2 W/m | K-27-0720-24<br>K-30-0720-24<br>K-35-0720-24<br>K-40-0720-24<br>K-50-0720-24 |
| LED tape K-HD-0830-24 8.3 W/m, IP20 NEW | | 20 | 8.3 W/m | K-HD27-0830-24<br>K-HD30-0830-24<br>K-HD35-0830-24<br>K-HD40-0830-24<br>K-HD50-0830-24 |
| LED tape K-0960-24 | - universal for basic applications | 20 | 9.6 W/m | K-27-0960-24<br>K-30-0960-24<br>K-30-0960-24-R30<br>K-35-0960-24<br>K-40-0960-24<br>K-40-0960-24-R30<br>K-50-0960-24<br>K-65-0960-24 |
| LED tape K-HD-0960-24 | - high LED density<br>- Ease of obtaining a line of light | 20 | 9.6 W/m | K-HD27-0960-24<br>K-HD30-0960-24<br>K-HD35-0960-24<br>K-HD40-0960-24<br>K-HD50-0960-24 |
| LED tape K-1000-24 10 W/m, IP20 NEW | | 20 | 10 W/m | K-30-1000-24<br>K-40-1000-24 |
| LED tape K-CB-1000-24 10 W/m, IP20 NEW | | 20 | 10 W/m | K-CB27-1000-24<br>K-CB30-1000-24<br>K-CB40-1000-24<br>K-CB50-1000-24 |
| LED tape K-1080-24 10.8 W/m, IP20 NEW | | 20 | 10.8 W/m | K-27-1080-24<br>K-30-1080-24<br>K-35-1080-24<br>K-40-1080-24<br>K-50-1080-24 |
| LED tape K-HD-1260-24 12.6 W/m, IP20 NEW | | 20 | 12.6 W/m | K-HD27-1260-24<br>K-HD30-1260-24<br>K-HD35-1260-24<br>K-HD40-1260-24<br>K-HD50-1260-24 |
| LED tape K-1275-24 | - universal for basic applications | 20 | 14.4 W/m | K-22-1275-24<br>K-25-1275-24<br>K-27-1275-24<br>K-30-1275-24<br>K-35-1275-24<br>K-40-1275-24<br>K-50-1275-24 |

# Profile LARKO-50

## Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-1440-24 | - universal for basic applications | 20 | 14.4 W/m | K-27-1440-24<br>K-30-1440-24<br>K-30-1440-24-R30<br>K-35-1440-24<br>K-40-1440-24<br>K-40-1440-24-R30<br>K-50-1440-24 |
| LED tape K-HD-1440-24 | - high LED density<br>- Ease of obtaining a line of light | 20 | 14.4 W/m | K-HD27-1440-24<br>K-HD30-1440-24<br>K-HD35-1440-24<br>K-HD40-1440-24<br>K-HD50-1440-24 |
| LED tape K2-1440-24 14.4 W/m, IP20 NEW | | 20 | 14.4 W/m | K2-27-1440-24<br>K2-30-1440-24<br>K2-35-1440-24<br>K2-40-1440-24<br>K2-50-1440-24 |
| LED tape K-1500-24 15 W/m, IP20 NEW | | 20 | 15 W/m | K-30-1500-24<br>K-40-1500-24 |
| LED tape K3-2160-24 21.6 W/m, IP20 NEW | - Three-row LED strip<br>- quick installation | 20 | 21.6 W/m | K3-27-2160-24<br>K3-30-2160-24<br>K3-35-2160-24<br>K3-40-2160-24<br>K3-50-2160-24 |
| LED tape K-2300-24 | - high power | 20 | 23 W/m | K-30-2300-24<br>K-40-2300-24 |
| LED tape K-2400-24 | - high power | 20 | 24 W/m | K-27-2400-24<br>K-30-2400-24<br>K-35-2400-24<br>K-40-2400-24<br>K-50-2400-24 |
| LED tape KWP-0360-24 3.6 W/m, IP65 NEW | | 65 | 3.6 W/m | KWP-27-0360-24<br>KWP-30-0360-24<br>KWP-35-0360-24<br>KWP-40-0360-24<br>KWP-50-0360-24 |
| LED tape KWP-GHD-0430-24 4.3 W/m, IP65 NEW | | 65 | 4.3 W/m | KWP-GHD27-0430-24<br>KWP-GHD30-0430-24<br>KWP-GHD35-0430-24<br>KWP-GHD40-0430-24<br>KWP-GHD50-0430-24 |
| LED tape KWP-HD-0430-24 4.3 W/m, IP65 NEW | | 65 | 4.3 W/m | KWP-HD27-0430-24<br>KWP-HD30-0430-24<br>KWP-HD35-0430-24<br>KWP-HD40-0430-24<br>KWP-HD50-0430-24 |
| LED tape KWP-0480-24 | - universal for basic applications | 65 | 4.8 W/m | KWP-27-0480-24<br>KWP-30-0480-24<br>KWP-35-0480-24<br>KWP-40-0480-24<br>KWP-50-0480-24 |
| LED tape KWP-GHD-0480-24 | - high LED density<br>- Ease of obtaining a line of light | 65 | 4.8 W/m | KWP-GHD27-0480-24<br>KWP-GHD30-0480-24<br>KWP-GHD35-0480-24<br>KWP-GHD40-0480-24<br>KWP-GHD50-0480-24 |
| LED tape KWP-0500-24 5 W/m, IP65 NEW | | 65 | 5 W/m | KWP-30-0500-24<br>KWP-40-0500-24 |

# Profile LARKO-50

## Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape KWP-0720-24 7.2 W/m, IP65 NEW | | 65 | 7.2 W/m | KWP-27-0720-24<br>KWP-30-0720-24<br>KWP-35-0720-24<br>KWP-40-0720-24<br>KWP-50-0720-24 |
| LED tape KWP-GHD-0830-24 8.3 W/m, IP65 NEW | | 65 | 8.3 W/m | KWP-GHD27-0830-24<br>KWP-GHD30-0830-24<br>KWP-GHD35-0830-24<br>KWP-GHD40-0830-24<br>KWP-GHD50-0830-24 |
| LED tape KWP-HD-0830-24 8.3 W/m, IP65 NEW | | 65 | 8.3 W/m | KWP-HD27-0830-24<br>KWP-HD30-0830-24<br>KWP-HD35-0830-24<br>KWP-HD40-0830-24<br>KWP-HD50-0830-24 |
| LED tape KWP-0960-24 | - universal for basic applications | 65 | 9.6 W/m | KWP-27-0960-24<br>KWP-30-0960-24<br>KWP-35-0960-24<br>KWP-40-0960-24<br>KWP-50-0960-24<br>KWP-65-0960-24 |
| LED tape KWP-GHD-0960-24 | - high LED density<br>- Ease of obtaining a line of light | 65 | 9.6 W/m | KWP-GHD27-0960-24<br>KWP-GHD30-0960-24<br>KWP-GHD35-0960-24<br>KWP-GHD40-0960-24<br>KWP-GHD50-0960-24 |
| LED tape KWP-1000-24 10 W/m, IP65 NEW | | 65 | 10 W/m | KWP-30-1000-24<br>KWP-40-1000-24 |
| LED tape KWP-CB-1000-24 10 W/m, IP65 NEW | | 65 | 10 W/m | KWP-CB27-1000-24<br>KWP-CB30-1000-24<br>KWP-CB40-1000-24<br>KWP-CB50-1000-24 |
| LED tape KWP-1080-24 10.8 W/m, IP65 NEW | | 65 | 10.8 W/m | KWP-27-1080-24<br>KWP-30-1080-24<br>KWP-35-1080-24<br>KWP-40-1080-24<br>KWP-50-1080-24 |
| LED tape KWP-GHD-1260-24 12.6 W/m, IP65 | | 65 | 12.6 W/m | KWP-GHD27-1260-24<br>KWP-GHD30-1260-24<br>KWP-GHD35-1260-24<br>KWP-GHD40-1260-24<br>KWP-GHD50-1260-24 |
| LED tape KWP-HD-1260-24 12.6 W/m, IP65 NEW | | 65 | 12.6 W/m | KWP-HD27-1260-24<br>KWP-HD30-1260-24<br>KWP-HD35-1260-24<br>KWP-HD40-1260-24<br>KWP-HD50-1260-24 |
| LED tape KWP-1440-24 | - universal for basic applications | 65 | 14.4 W/m | KWP-27-1440-24<br>KWP-30-1440-24<br>KWP-35-1440-24<br>KWP-40-1440-24<br>KWP-50-1440-24 |
| LED tape KWP-GHD-1440-24 | - high LED density<br>- Ease of obtaining a line of light | 65 | 14.4 W/m | KWP-GHD27-1440-24<br>KWP-GHD30-1440-24<br>KWP-GHD35-1440-24<br>KWP-GHD40-1440-24<br>KWP-GHD50-1440-24 |
| LED tape KWP-1500-24 15 W/m, IP65 NEW | | 65 | 15 W/m | KWP-30-1500-24<br>KWP-40-1500-24 |

**RELATED ACCESSORIES > RELATED LED > CRI 95+**

# Profile LARKO-50

Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-CR-0480-24 | - universal for basic applications<br>- CRI over 95 | 20 | 4.8 W/m | K-CR27-0480-24<br>K-CR30-0480-24<br>K-CR35-0480-24<br>K-CR40-0480-24<br>K-CR50-0480-24 |
| LED tape K-CR-1210-24 | - CRI over 95 | 20 | 4.8 W/m | K-CR22-1210-24<br>K-CR25-1210-24<br>K-CR27-1210-24<br>K-CR30-1210-24<br>K-CR35-1210-24<br>K-CR40-1210-24<br>K-CR50-1210-24 |
| LED tape K-CRHD-1910-24 | - CRI over 95<br>- high LED density | 20 | 9.1 W/m | K-CRHD22-1910-24<br>K-CRHD25-1910-24<br>K-CRHD27-1910-24<br>K-CRHD30-1910-24<br>K-CRHD35-1910-24<br>K-CRHD40-1910-24<br>K-CRHD50-1910-24 |
| LED tape K-CR-0960-24 | - universal for basic applications<br>- CRI over 95 | 20 | 9.6 W/m | K-CR27-0960-24<br>K-CR30-0960-24<br>K-CR35-0960-24<br>K-CR40-0960-24<br>K-CR50-0960-24 |
| LED tape K-CR-1220-24 | - CRI over 95 | 20 | 9.6 W/m | K-CR22-1220-24<br>K-CR25-1220-24<br>K-CR27-1220-24<br>K-CR30-1220-24<br>K-CR35-1220-24<br>K-CR40-1220-24<br>K-CR50-1220-24 |
| LED tape K-CR-1275-24 | - CRI over 95 | 20 | 14.4 W/m | K-CR22-1275-24<br>K-CR25-1275-24<br>K-CR27-1275-24<br>K-CR30-1275-24<br>K-CR35-1275-24<br>K-CR40-1275-24<br>K-CR50-1275-24 |
| LED tape K-CR-1440-24 | - universal for basic applications<br>- CRI over 95 | 20 | 14.4 W/m | K-CR27-1440-24<br>K-CR30-1440-24<br>K-CR35-1440-24<br>K-CR40-1440-24<br>K-CR50-1440-24 |
| LED tape K-CRHD-1820-24 | - CRI over 95<br>- high LED density | 20 | 18.25 W/m | K-CRHD22-1820-24<br>K-CRHD25-1820-24<br>K-CRHD27-1820-24<br>K-CRHD30-1820-24<br>K-CRHD35-1820-24<br>K-CRHD40-1820-24<br>K-CRHD50-1820-24 |
| LED tape KWP-CR-0480-24 | - universal for basic applications<br>- CRI over 95 | 65 | 4.8 W/m | KWP-CR27-0480-24<br>KWP-CR30-0480-24<br>KWP-CR35-0480-24<br>KWP-CR40-0480-24<br>KWP-CR50-0480-24 |
| LED tape KWP-CR-0960-24 | - universal for basic applications<br>- CRI over 95 | 65 | 9.6 W/m | KWP-CR27-0960-24<br>KWP-CR30-0960-24<br>KWP-CR35-0960-24<br>KWP-CR40-0960-24<br>KWP-CR50-0960-24 |

**RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY**

# Profile LARKO-50

Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-HEHD-0480-24 | - CRI over 95<br>- High Efficacy | 20 | 4.8 W/m | K-HEHD22-0480-24<br>K-HEHD25-0480-24<br>K-HEHD27-0480-24<br>K-HEHD30-0480-24<br>K-HEHD35-0480-24<br>K-HEHD40-0480-24<br>K-HEHD50-0480-24 |
| LED tape K-VHE-0480-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20 | 4.8 W/m | K-VHE27-0480-24<br>K-VHE30-0480-24<br>K-VHE35-0480-24<br>K-VHE40-0480-24<br>K-VHE50-0480-24 |
| LED tape K-HEHD-0960-24 | - CRI over 95<br>- High Efficacy | 20 | 9.6 W/m | K-HEHD22-0960-24<br>K-HEHD25-0960-24<br>K-HEHD27-0960-24<br>K-HEHD30-0960-24<br>K-HEHD35-0960-24<br>K-HEHD40-0960-24<br>K-HEHD50-0960-24 |
| LED tape K-VHE-0960-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20 | 9.6 W/m | K-VHE27-0960-24<br>K-VHE30-0960-24<br>K-VHE35-0960-24<br>K-VHE40-0960-24<br>K-VHE50-0960-24 |
| LED tape K-HEHD-1440-24 | - CRI over 95<br>- High Efficacy | 20 | 14.4 W/m | K-HEHD22-1440-24<br>K-HEHD25-1440-24<br>K-HEHD27-1440-24<br>K-HEHD30-1440-24<br>K-HEHD35-1440-24<br>K-HEHD40-1440-24<br>K-HEHD50-1440-24 |
| LED tape K-VHE-1440-24 | - universal for basic applications<br>- high efficacy<br>- High Efficacy | 20 | 14.4 W/m | K-VHE27-1440-24<br>K-VHE30-1440-24<br>K-VHE35-1440-24<br>K-VHE40-1440-24<br>K-VHE50-1440-24 |
| LED tape K-HEHD-1920-24 | - CRI over 95<br>- High Efficacy | 20 | 19.2 W/m | K-HEHD22-1920-24<br>K-HEHD25-1920-24<br>K-HEHD27-1920-24<br>K-HEHD30-1920-24<br>K-HEHD35-1920-24<br>K-HEHD40-1920-24<br>K-HEHD50-1920-24 |

## RELATED ACCESSORIES > RELATED LED

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-SD-1440-24 | | 20 | 14.4 W/m | K-SD27-1440-24<br>K-SD30-1440-24<br>K-SD35-1440-24<br>K-SD40-1440-24 |
| LED tape KWP-RGB27T50-1200-24, 2700K, 390 lm/m, 12 W/m, IP65 | | 65 | 12 W/m | KWP-RGB27T50-1200-24 |
| LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW | - RGBW<br>- high LED density | 65 | 15.3 W/m | KWP-RGB30-1530-24<br>KWP-RGB40-1530-24 |

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

# Profile LARKO-50

Ref. A00756

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-RGB-1200-24 | - RGB | 20 | 12 W/m | K-RGB-1200-24 |
| LED tape KWP-RGB-1200-24 | - RGB | 65 | 12 W/m | KWP-RGB-1200-24 |

## RELATED ACCESSORIES > RELATED LED > DIGITAL

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| Digital LED strip K-DL-1229-24 | - Digital tape | 20 | 12.29 W/m | K-DL30-1229-24<br>K-DL40-1229-24 |
| Digital LED strip KWP-GDL-1229-24 | - Digital tape | 65 | 12.29 W/m | KWP-GDL30-1229-24<br>KWP-GDL40-1229-24 |

## RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

| Name | Key features | IP protection rating | Power consumption | Ref. |
|---|---|---|---|---|
| LED tape K-18D30-0960-24 | - Dim To Warm LED Tape | 20 | 9.6 W/m | K-18D30-0960-24 |
| LED tape K-27T50-1440-24 | - RGB+Tunable White | 20 | 14.4 W/m | K-27T50-1440-24 |
| LED tape KWP-18D30-0960-24 | | 65 | 9.6 W/m | KWP-18D30-0960-24 |
| LED tape KWP-27T50-1440-24 | | 65 | 14.4 W/m | KWP-27T50-1440-24 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SPRINGS FOR RECESSED MOUNT AND MOUNTING TRACKS

| Name | Material | Color | Ref. |
|---|---|---|---|
| Spring KMA | stainless steel | silver | C24503N00 |

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

| Name | Material | Color | Ref. |
|---|---|---|---|
| Connector ZM | stainless steel | silver<br>silver<br>silver<br>silver<br>black colored<br>colorless non colored<br>black colored<br>silver<br>black colored<br>silver<br>black colored<br>silver<br>black colored<br>silver<br>black colored<br>silver<br>black colored<br>silver<br>silver | 42716<br>42717<br>42720<br>42728<br>C24797C07<br>C24797N00<br>C28070C07<br>C28070N00<br>C28071C07<br>C28071N00<br>C28072C07<br>C28072N00<br>C28073C07<br>C28073N00<br>C28074C07<br>C28074N00<br>C28075C07<br>C28075N00<br>C28243N00 |
| Connector ZM-T | stainless steel | black colored<br>silver<br>black colored<br>silver<br>black colored<br>silver | C28076C07<br>C28076N00<br>C28077C07<br>C28077N00<br>C28078C07<br>C28078N00 |

# Profile LARKO-50

Ref. A00756

| Name | Material | Color | Ref. |
|---|---|---|---|
| Connector ZM-PION | stainless steel | silver | 42314 |
| | | silver | 42316 |
| | | silver | 42320 |
| | | silver | 42718 |
| | | silver | 42719 |
| | | black colored | C28084C07 |
| | | silver | C28084N00 |
| | | black colored | C28085C07 |
| | | silver | C28085N00 |
| | | black colored | C28086C07 |
| | | silver | C28086N00 |
| | | black colored | C28087C07 |
| | | silver | C28087N00 |
| | | black colored | C28088C07 |
| | | silver | C28088N00 |

## RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller LED MONO, Wlightboxs 120W IP20 | 20 | E60228 |

## RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

| Name | IP protection rating | Ref. |
|---|---|---|
| Controller LED Casambi CBU-PWM4 | 20 | E62148 |

## RELATED ACCESSORIES > ELECTRONICS > SWITCHES

| Name | Key features | IP protection rating | Ref. |
|---|---|---|---|
| Proximity switch UNI-11 NEW | - touchless switch<br>- width 11mm | 20 | E61603 |
| Proximity switch UNI-11P NEW | - touchless switch<br>- width 11mm<br>- factory pre-soldered wires | 20 | E61604 |
| Proximity switch UNI-P | - touchless switch<br>- width only 7mm<br>- factory pre-soldered wires | 20 | E61580 |
| Proximity switch UNI | - touchless switch<br>- width only 7mm | 20 | E61579 |