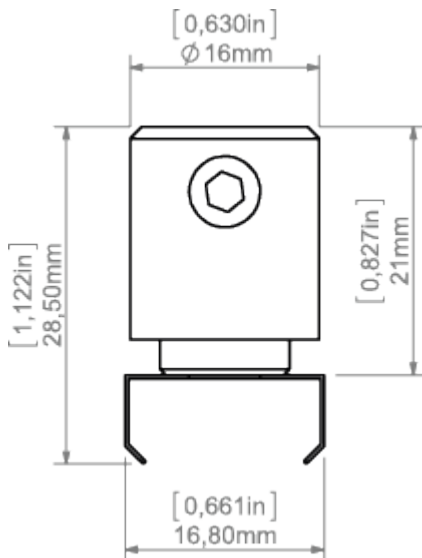


**PRODUCT DESCRIPTION**

Standard conductive fastener for light-weight fixtures. The extrusion is inserted into the PDS MOUNTING BRACKET. Power is supplied through a hole inside the fastener. One current pole is powered from one fastener that is equipped with a longitudinal hole for the FI-3 ROD, which acts as a power conductor

Fill empty fields


Product nr.  
Fixture type  
Company  
Job name  
Date

**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**


**RELATED PROFILES**




45-16 Profile  
Ref: B8504



MICRO-ALU Profile  
Ref: B1888




TAMI Profile  
Ref: B5390




PDS-4-ALU Profile  
Ref: B1718




REGULOR Profile  
Ref: B468+43



PDS-O Profile  
Ref: B3777



PDS-4-PLUS  
Profile  
Ref: C1263



TAPO Profile  
Ref: C1919

RELATED PRODUCTS


ACCESSORIES




100 PUSZ brass  
chrome Rod 1 m  
Ref: 42518



Brass chrome FI-3  
Rod 1m  
Ref: 42501



Steel FI-3 Rod 53  
cm  
Ref: 1528



Steel wire FI-1 1m  
Ref: 1397