

## PRODUCT DESCRIPTION

The hanger consists of two pieces with holes. Both parts should be inserted into the guide (small lock) of the selected extrusion. After insertion, they form a hanger that can be used to suspend the lighting fixture, by pulling e.g. a steel cable through it. To prevent the halves from moving in the guide, use the ZM BLOCK

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date




## TECHNICAL SPECIFICATION


## TECHNICAL DRAWING

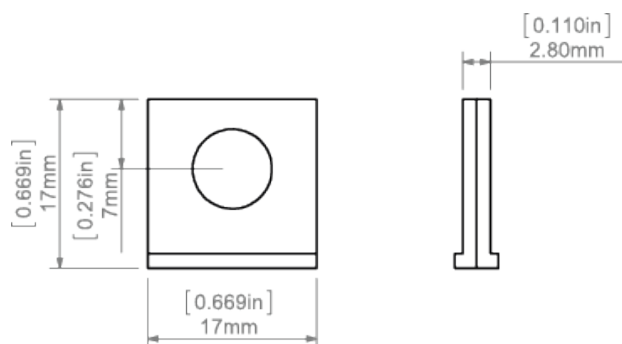


**RELATED PROFILES**



GIZA-LL profile  
Ref: C0758




OPK-4 Profile  
Ref: C0370



3035 Profile  
Ref: 18039




JAZ Profile  
Ref: B8547



OLEK Profile  
Ref: B8505




PDS-ZM Profile  
Ref: B7696




GLAD-45 Profile  
Ref: B7009




GIZA Profile  
Ref: B5556




LIPOD Profile  
Ref: B5554




SEPOD Profile  
Ref: B6593




3035-O Profile  
Ref: B8441




PIKO-ZM Profile  
Ref: C1168




PDS-ZMG Profile  
Ref: C1418




PDS-ZM-PLUS  
Profile  
Ref: C2056



4050 Profile  
Ref: 18050



4050-W Profile  
Ref: 18051



GIZA-DUO-LL  
Profile  
Ref: C2162

RELATED PRODUCTS

ACCESSORIES



Steel wire FI-1 1m  
Ref: 1397